

**SONY**

## Sony Projectors. Presenting Performance Excellence.

### SONY® PROJECTORS

Sony projectors are designed with the professional in mind. From high brightness and contrast performance and flexible multi-input and networking capabilities to fast, automatic set-up, there's a Sony projector for virtually every venue, budget and need.

#### SUPERLITE® SERIES



Portable, high quality projectors that offer the remarkable combination of press-and-play performance and simple operation.

- Up to 2000 ANSI lumens brightness
- Up to XGA native resolution (1024 x 768)
- Automatic set-up (lens, input, tilt, pixel and keystone)
- Accepts Composite, Component and PC Inputs
- Ultra portable and stylish design
- Short focal length zoom lens

#### SUPERBRIGHT™ SERIES



Sony projectors with superb brightness and fashionable design for professional presentations.


- Up to 3500 ANSI lumens brightness
- XGA native resolution (1024 x 768)
- Accepts Composite, Component and PC Inputs
- 10 Base-T/100 Base-TX ethernet for LAN connection
- Back-2-front 90 degree tilt capabilities
- SNMP compliant (Simple Network Mgmt. Protocol)

#### SUPERSMART™ SERIES



High impact multimedia presentations supported by Sony's highest contrast ratios and brightness output for all lighting conditions.

- Up to 2000 ANSI lumens brightness
- XGA native resolution (1024 x 768)
- Accepts Composite, Component and PC Inputs
- 10 Base-T/100 Base-TX ethernet for LAN connection
- PC Card Slot for Wireless Peer to Peer
- SNMP compliant (Simple Network Mgmt. Protocol)
- Built-in Microsoft® Windows® CE and Web browser

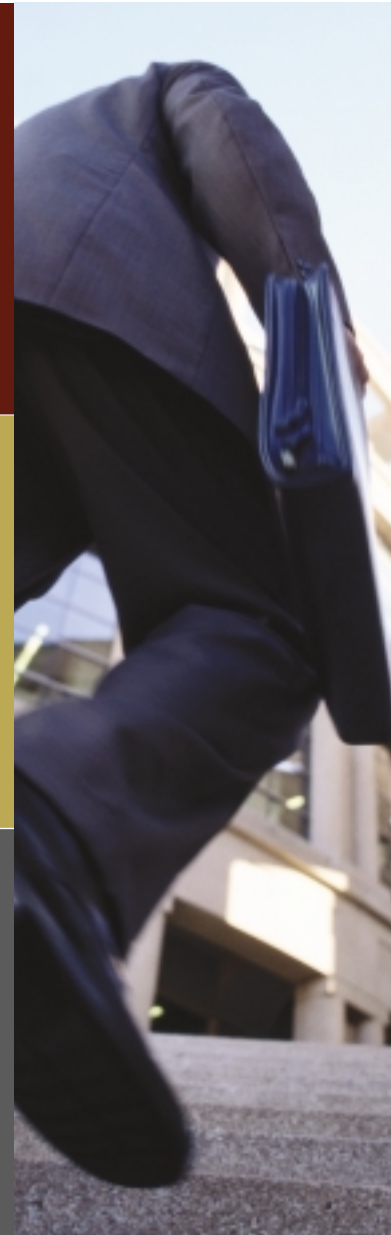

If you are a corporate, government or education client,  
please visit us at [sony.com/projectors](http://sony.com/projectors) for more information.

professional. portable. powerful.

**SUPERLITE™**  
SERIES

**SUPERBRIGHT™**  
SERIES

**SUPERSMART™**  
SERIES



Model Number	VPL-DS100	VPL-EX1	VPL-CS6	VPL-CX6	VPL-PX35	VPL-PX40	VPL-PX15
ANSI Lumens	1200	1500	1800	2000	2600	3500	2000
Projection System	3 LCD panels, 1 lens projection system	3 LCD panels, 1 lens projection system	3 LCD panels, 1 lens projection system	3 LCD panels, 1 lens projection system	3 LCD panels, 1 lens projection system	3 LCD panels, 1 lens projection system	3 LCD panels, 1 lens projection system
LCD Panel Type	0.7-inch p-Si TFT LCD panel, 1,440,000 pixels (480,000 pixels x 3)	0.7-inch p-Si TFT LCD panel with Micro Lens Array, 2,359,296 pixels (786,432 pixels x 3)	0.7-inch p-Si TFT LCD panel, 1,440,000 pixels (480,000 pixels x 3)	0.7-inch p-Si TFT LCD panel with Micro Lens Array, 2,359,296 pixels (786,432 pixels x 3)	0.99-inch p-Si TFT Sony LCD panel 2,359,296 pixels (786,432 pixels x 3)	0.99-inch p-Si TFT Sony LCD panel with Micro Lens Array 2,359,296 pixels (786,432 pixels x 3)	0.9-inch p-Si TFT LCD panel with Micro Lens Array 2,359,296 pixels (786,432 pixels x 3)
Projection Lens	1.2 times zoom lens	1.2 times zoom lens	1.2 times zoom lens	1.2 times zoom lens	1.3 times zoom lens	1.3 times zoom lens	1.3 times manual zoom lens
Lamp Type	157W UHP lamp	165W UHP lamp	165W UHP lamp	165W UHP lamp	265W UHP lamp	265W UHP lamp	200W lamp
Screen Size Coverage (diagonally)	40 to 150 inches	40 to 150 inches	40 to 150 inches	40 to 150 inches	40 to 300 inches	40 to 300 inches	40 to 300 inches
Video Resolution	600 lines	750 lines	600 lines	750 lines	750 lines	750 lines	750 lines
PC Native Resolution	800 x 600	1024 x 768	800 x 600	1024 x 768	1024 x 768	1024 x 768	1024 x 768
Audio	1 watt (mono)	1 watt (mono)	1 watt (mono)	1 watt (mono)	Stereo Speakers Max. 2W x 2	Stereo Speakers Max. 2W x 2	Stereo Speakers Max. .5W x 2
USB	N/A	Up (B type female)	Up (B type female)	Up (B type female)	Up (B type female)	Up (B type female)	UP (B type female) x 1, Down (A type female) x 1
Video Inputs	Component (HD15), Composite (RCA), S-Video	Component (HD15), Composite (RCA), S-Video	Component (HD15), Composite (RCA), S-Video	Component (HD15), Composite (RCA), S-Video	Component (BNC), Composite (BNC), S-Video	Component (BNC), Composite (BNC), S-Video	Component (BNC), Composite (BNC), S-Video
Input Acceptable	Up to XGA resolution, Composite, Component, HDTV	Up to SXGA resolution, Composite, Component	Up to SXGA resolution, Composite, Component	Up to SXGA resolution, Composite, Component	Up to UXGA resolution, Composite, Component, HDTV	Up to UXGA resolution, Composite, Component, HDTV	Up to SXGA resolution, Composite, Component
PC Inputs	HD15	HD15	HD15	HD15	DVI-D, HD15	DVI-D, HD15	HD15
Audio Inputs	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack
Video/Audio Out	N/A	N/A	N/A	N/A	HD15/Stereo Mini Jack	HD15/Stereo Mini Jack	HD15/Stereo Mini Jack
Monitor Out	Yes	No	No	No	No	No	No
Memory Stick™ Media	N/A	N/A	N/A	Memory Stick PRO™ Media	N/A	N/A	N/A
PC Card Slot	N/A	N/A	N/A	N/A	N/A	N/A	PC Card Slot Type II
Ethernet Network Connection	N/A	N/A	N/A	N/A	RJ-45: 10 Base-T/100 Base-TX	RJ-45: 10 Base-T/100 Base-TX	RJ-45: 10 Base-T/100 Base-TX
Automatic Setup	Yes	Yes	Yes	Yes	N/A	N/A	N/A
Tilt Adjust	Powered	Powered	Powered	Powered	Yes	Yes	Yes
Auto Sensing Input	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Auto Keystone Adjustment	Yes	Yes	Yes	Yes	Manual	Manual	Manual
Auto Pixel Adjustment	Yes	Yes	Yes	Yes	Yes	Yes	Yes
PJ Net!™ Software	No	No	No	No	Optional	Optional	Optional
Kensington Security Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Power Management: Max. Watts	250W	240W	240W	240W	365W	365W	300W
Power Management: Standby	5W	5W	5W	7W	6W	6W	4.2W
Dimensions (W x H x D)	11.6" x 3.1" x 9.4"	11.3" x 2.8" x 9.0"	11.3" x 2.8" x 9.0"	11.3" x 2.8" x 9.0"	16.6" x 4.6" x 12.5"	16.6" x 4.6" x 12.5"	12.9" x 4.4" x 11.3"
Weight	Approx. 6 lbs., 3 oz.	Approx. 5 lbs., 15 oz.	Approx. 5 lbs., 15 oz.	Approx. 5 lbs., 15 oz.	Approx. 16 lbs., 10 oz.	Approx. 16 lbs., 10 oz.	Approx. 11 lbs., 11 oz.
Safety Regulations	UL, cUL, FCC Class B, IC Class B, NEMKO, CE (LVD), CE (EMC), C-Tick, CCC	UL, cUL, FCC Class B, IC Class B, NEMKO, CE (LVD), CE (EMC), C-Tick, CCC	UL, cUL, FCC Class B, IC Class B, NEMKO, CE (LVD), CE (EMC), C-Tick, CCC	UL, cUL, FCC Class B, IC Class B, NEMKO, CE (LVD), CE (EMC), C-Tick, CCC	UL, cUL, FCC Class B, IC Class B, NEMKO, CE (LVD), CE (EMC), C-Tick, CCC, VCCI Class B, JEITA	UL, cUL, DHHS, FCC Class A, IC Class A, NEMKO, CE (LVD), CE (EMC), C-Tick, CCC, VCCI Class B, JEITA	UL, cUL, DHHS, FCC Class A, IC Class A, NEMKO, CE (LVD), CE (EMC), C-Tick, CCC, VCCI Class B, JEITA
Supplied Accessories	Remote Commander* (RMPJ2) Unit, Monitor Cable, A type to B type, Soft Case, AA size Battery (2), Air Filter, AC Power Cord, Operation Manual, Quick Reference Sheet, CD-ROM (Application Software), Security Label	Remote Commander* (RMPJ2) Unit, Monitor Cable, USB Cable: A type to B type, Soft Case, AA size Battery (2), Air Filter, AC Power Cord, Operation Manual, Quick Reference Sheet, CD-ROM (Application Software), Security Label	Remote Commander* Unit, Monitor Cable, USB Cable: A type to B type, Soft Case, AA size Battery (2), Air Filter, AC Power Cord, Operation Manual, Quick Reference Sheet, Security Label	Remote Commander* Unit, Monitor Cable, Soft Case, Lithium Battery CR2025 (1), Air Filter, AC Power Cord, Operation Manual, Quick Reference Sheet, Security Label	Remote Commander* Unit, Monitor Cable (2 m), HD D-sub 15-pin to HD D-sub 15-pin, USB Cable A type to B type (2 m), AA size Battery (2), Lens Cap, Air Filter, Operating Manual, Installation Manual for Dealers	Remote Commander* Unit, Monitor Cable (2 m), HD D-sub 15-pin to HD D-sub 15-pin, USB Cable A type to B type (2 m), AA size Battery (2), Lens Cap, Air Filter, Operating Manual, Installation Manual for Dealers	Remote Commander* Unit, Signal Cable SMF-410, HD D-sub 15-pin to D-sub 15-pin, USB Cable: A type to B type, Projector Station* USB Application Software (CD-ROM), AA size Battery (2), Air Filter (for replacement), AC Power Cord, Operation Manual, Operation Manual for Networking, Installation Manual for Dealers, Specified/recommended PC Card/Wireless LAN Access Point List, Quick Guide
Additional Accessories Available	Lamp (LMP-C150), Hand Carry Case (VLC-U20TH), Ceiling Mount (PSSEC1US)	Lamp (LMP-C150), Hand Carry Case (VLC-U20TH), Ceiling Mount (PSSEC1US)	Lamp (LMP-C150), Hand Carry Case (VLC-U20TH), Ceiling Mount (PSSEC1US), Ceiling Mount (PSS/C5)	Lamp (LMP-C150), Hand Carry Case (VLC-U20TH), Ceiling Mount (PSSEC1US), Ceiling Mount (PSS/C5)	Lamp (LMP-P260), Suspension Pole (PSS-610), Lens (VPL-FM22), Lens (VPL-ZM102)	Lamp (LMP-P260), Suspension Pole (PSS-610), Lens (VPL-FM22), Lens (VPL-ZM102)	Lamp (LMP-P202), Short Throw Converter (VPL-CW10), Long Throw Converter (VPL-CT10), Carry Case (VLC-SP15A1AC2), Carry Case (VLC-SP15C2), Suspension Pole (PSS10), Ceiling Mount (PSS-610)
Limited Warranty	2 years parts and labor	2 years parts and labor	2 years parts and labor	2 years parts and labor	2 years parts and labor	2 years parts and labor	2 years parts and labor
Extended Warranty	Optional 1 year extension	Optional 1 year extension	Optional 1 year extension	Optional 1 year extension	Optional 1 year extension	Optional 1 year extension	Optional 1 year extension

